

100 Gb/s (4x25 Gb/s), 10 km CWDM LR4, Singlemode QSFP28 Dual LC Package

Description

OptixCom's 100 Gb/s QSFP+ LR4 optical transceiver is designed to operate with 4x CWDM channels for up to 10 km of transmission distance. The transceiver uses 1296, 1300, 1305 and 1309 nm DFB laser wavelengths, with each wavelength running at 25 Gb/s. They are then multiplexed together into a single channel to achieve 100 Gb/s of data transmission.

On the receiver side, the 100 Gb/s data signal is demultiplexed and converted to the same 4x CWDM channels as the transmitter side. It is compliant with 100G Ethernet standard and QSFP28 Multi-Source Agreement (MSA) SFF-8436 for datacom applications.

The transceiver uses dual LC connector for single mode applications. It is hot pluggable in the z-axis with a 38-pin connector. The product is RoHS compliant. Total power consumption is < 3.5W.




Lead-Free

QFP-100GLR4-AT10K



4 x 25 Gb/s Channels, 2³¹-1 NRZ Data Eye Pattern

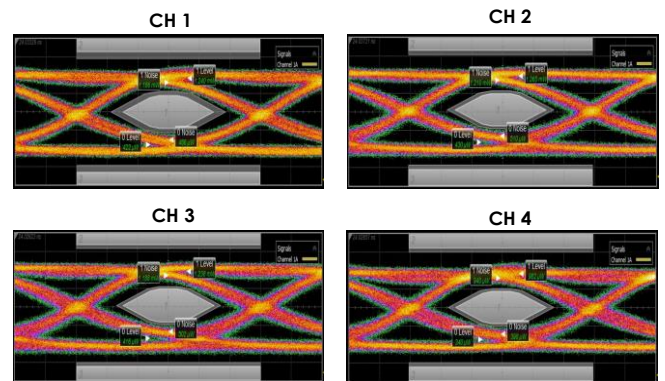

Key Features

- 4x CWDM channels 1296, 1300, 1305 and 1309 nm.
- 100 Gb/s, 25 Gb/s for each LR4 wavelength
- 10 km transmission distance for SMF
- Duplex LC singlemode interface connector
- 38-pin Z-axis hot pluggable connector
- Compliant with QSFP+ MSA standard
- Compliant with IEEE 802.3ba/bm, 100GBASE-LR4
- Single 3.3V power supply
- RoHS compliant

Applications

- ✓ 100G Fiber Channel and Ethernet
- ✓ InfiniBand 4X SDR DDR QDR
- ✓ Data Communication for SAN and LAN
- ✓ Central offices routers and switches
- ✓ Mass storage systems interconnect
- ✓ Computer cluster cross-connect

Ordering Information

Part Number: QFP-100GLR4-AT10K

Description:

QSFP28, 4x CWDM LR4, 100 Gb/s, single mode, dual LC fiber optics transceiver, 10 km reach, 0-70°C

Operating Conditions

Parameter	Min.	Typical	Max.	Units
Operate Temperature	0	25	70	°C
Data Rate	103	---	112	Gb/s
Supply Voltage	3.14	3.3	3.46	V
Supply Current	---	---	1060	mA

Absolute Maximum Ratings

Parameter	Symbol	Min.	Max.	Units
Storage Temperature	T_{st}	-40	85	°C
Supply Voltage	V_{CC}	-0.3	4	V
Input Voltage	V_{IN}	$V_{CC}-0.3$	$V_{CC}+0.3$	V
Relative Humidity	$R.H.$	5	95	%
Output Current	I_o	---	50	mA

Transmitter Electro-Optical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Units
Differential Input Voltage ¹	ΔV_i	0.3	---	1.0	V
Differential Input Impedance ²	Z	---	100	---	ohm
Optical Output Power per Lane ³	P_o	-4.3	---	4.5	dBm
Total Optical Power	P_T	---	---	10.5	dBm
Transmitter & Dispersion Penalty	TDP	---	---	3.5	dB
Optical Wavelength 1	λ_o	1294.53	1295.56	1296.59	nm
Optical Wavelength 2	λ_o	1299.02	1300.05	1301.09	nm
Optical Wavelength 3	λ_o	1303.54	1304.58	1305.63	nm
Optical Wavelength 4	λ_o	1308.09	1309.14	1310.19	nm
Side Mode Suppression Ratio	$SMSR$	30	---	---	dB
Relative Intensity Noise	RIN	---	---	-128	dB/Hz
Spectral Width (-20 dB)	$\Delta\lambda$	---	---	1	nm
Extinction Ratio	ET	4	---	---	dB
TX Disable Asserted	P_{OFF}	---	---	-30	dBm
TX Enabled Assert Time	T_{TAss}	---	---	100	ms
TX Disabled Deassert Time	T_{TDis}	---	---	400	μs
Input Voltage – Logic High	V_{DH}	2.0	---	V_{CC}	V
Input Voltage – Logic Low	V_{DL}	0	---	0.4	V
Reset Initial Assert Time	T_{RSass}	---	---	2	μs

Transmitter Electro-Optical Characteristics (Cont.)

Parameter	Symbol	Min.	Typical	Max.	Units
Reset Assert Time	T_{riass}	---	---	2000	ms
Time to Initialize	T_{ini}	---	---	2000	ms
TX Fault Assert Time	T_{txass}	---	---	200	ms
Flag Assert Time	T_{fgass}	---	---	200	ms

Receiver Electro-Optical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Units
Operating Wavelength	λ_c	1250	---	1360	nm
Receiver Overload	P_{max}	4.5	---	---	dBm
Receiver Sensitivity per Lane ¹	P_I	---	---	-10.6	dBm
Differential Output Voltage	ΔV_o	0.3	---	0.8	V
Differential Input Impedance ²	Z	---	100	---	Ohm
Receiver Reflectance	OL	---	---	-26	dB
Rise/Fall Time (20% - 80%)	T_r/T_f	---	---	28	ps
RX Signal Loss – Asserted	P_{SD+}	---	---	-12	dBm
RX Signal Loss – Deasserted	P_{SD-}	-30	---	---	dBm
Output Voltage – Logic High	V_{RL+}	2.0	---	V_{CC}	V
Output Voltage – Logic Low	V_{RL-}	0	---	0.4	V
RX LOS Assert Time	T_{RL+}	---	---	100	ms
RX LOS Deassert Time	T_{RL-}	---	---	100	ms
ModSel Assert Time	$T_{ModSelAss}$	---	---	100	μ s
ModSel Deassert Time	$T_{ModSelDea}$	---	---	100	μ s

Notes:

1. Test at 25 Gb/s, $2^{31} - 1$ PRBS data pattern, and $> 1 \times 10^{-12}$ of Bit-Error-Rate (BER).
2. Single ended will be 50 ohm for each signal line.
3. Refer to OptixCom "QSFP Design Reference Guide" for more design details.